

# PANZERI

## Gonio

120-277V AC dimmable (0-10V)


A019U01.030.0453

● white




### Spec sheet

CODE	A019U01.030.0453
SYSTEM POWER CONSUMPTION	24W
EFFICACY	90.33lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 72.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	asymmetric
POWER SUPPLY	120-277V AC
FREQUENCY	60Hz
ELECTRICAL CONFIGURATION	dimmable (0-10V)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	3120lm
DELIVERED LUMEN OUTPUT	2168lm
EFFICIENCY	69.5%
WEIGHT	2,38 lbs
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	7,7 x 13,8 x 3,9 in

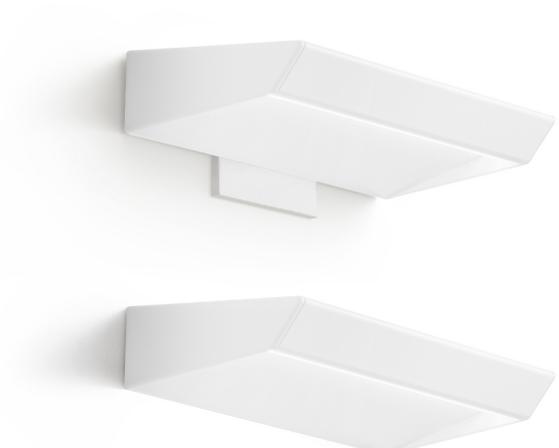


Wall lighting fixture for interiors, with direct and indirect light emission.  
 Pickled sheet metal wall bracket in polyacrylic paint.  
 Extruded aluminium structure in white, black, bronze, mat brass or titanium polyacrylic paint.  
 Extruded acrylic diffusers with opaline finish.  
 Die-cast aluminium end caps in polyacrylic paint.

### Technical drawing

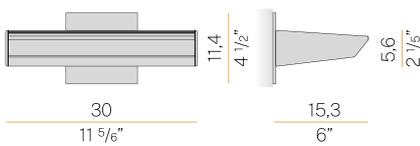

### Polar diagram

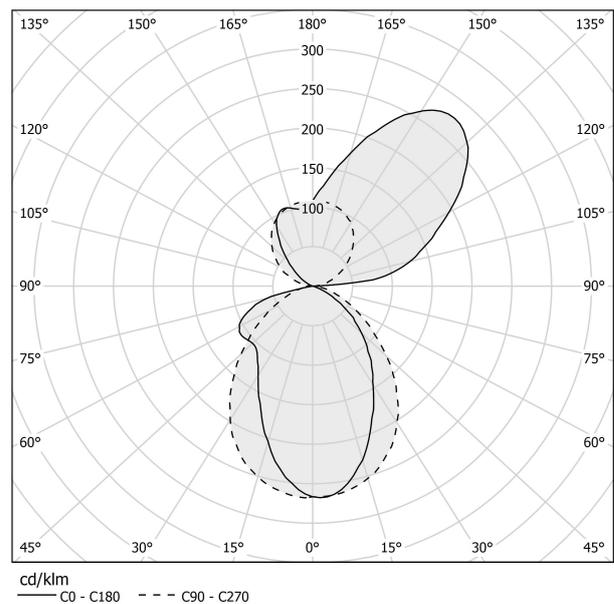

# PANZERI

## Gonio

### Accessories / power supply and fixing

---

YFJ00.70U

Junction box adapter for flush wall installation.

