

PANZERI

Gonio

120-277V AC dimmable (0-10V)

A019U01.045.0553

● white




Spec sheet

CODE	A019U01.045.0553
SYSTEM POWER CONSUMPTION	35W
EFFICACY	92.9lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 72.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	asymmetric
POWER SUPPLY	120-277V AC
FREQUENCY	60Hz
ELECTRICAL CONFIGURATION	dimmable (0-10V)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	4680lm
DELIVERED LUMEN OUTPUT	3252lm
EFFICIENCY	69.5%
WEIGHT	3.59 lbs
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	7,1 x 18,1 x 7,9 in




Wall lighting fixture for interiors, with direct and indirect light emission.
 Pickled sheet metal wall bracket in polyacrylic paint.
 Extruded aluminium structure in white, black, bronze, mat brass or titanium polyacrylic paint.
 Extruded acrylic diffusers with opaline finish.
 Die-cast aluminium end caps in polyacrylic paint.

Technical drawing

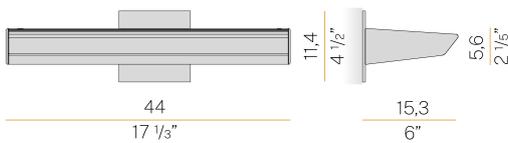

Polar diagram

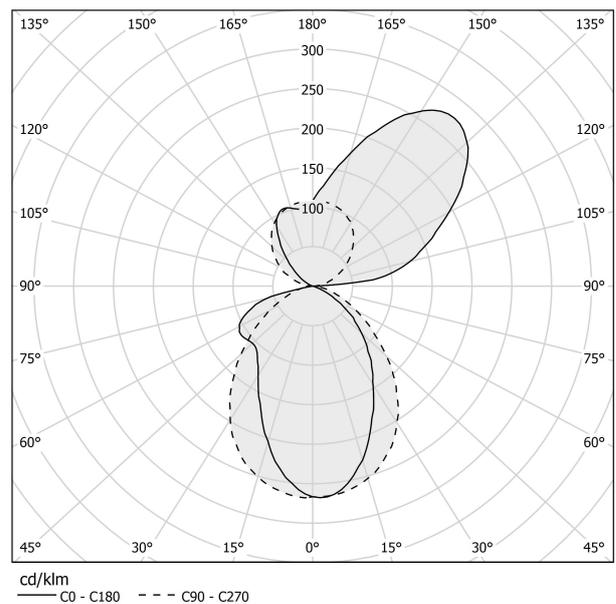

PANZERI

Gonio

Accessories / power supply and fixing

YFJ00.70U

Junction box adapter for flush wall installation.

