

Zero Line

24V DC 24V
A036U01.050.0510

white




Spec sheet

CODE	A036U01.050.0510
SYSTEM POWER CONSUMPTION	12,2W
EFFICACY	53.33lm/W
LIGHT SOURCE	LED
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
ELECTRICAL CONFIGURATION	24V
DRIVER	remote not included
NOMINAL LUMINOUS FLUX	1448lm
DELIVERED LUMEN OUTPUT	640lm
EFFICIENCY	44.2%
WEIGHT	2,03 lbs
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	3,9 x 32,7 x 2,0 in



Technical drawing

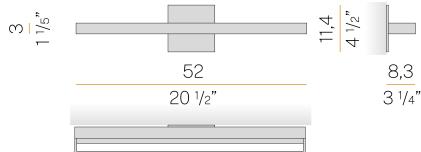

Ceiling or wall lighting fixture for interiors, with direct and indirect light emission. Pickled sheet metal structure in white, bronze or mat brass polyacrylic paint, or with gold leaf coating, or in polished stainless steel.

Specular aluminium reflector.


Cover in brass with white, bronze or mat brass polyacrylic paint, or with gold leaf coating, or with galvanic chrome plating.

Extruded polycarbonate diffuser with opaline finish.

Application



Polar diagram

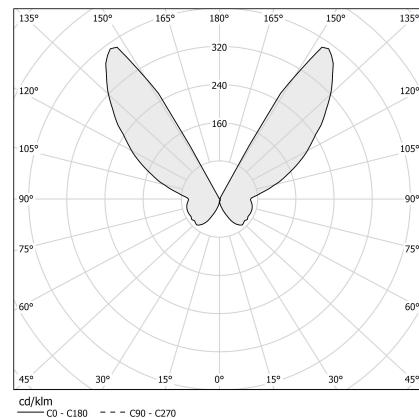

PANZERI

Zero Line

Accessories / power supply and fixing

YFJ00.70U

Junction box adapter for flush wall installation.

