

PANZERI

Zero Line

24V DC 24V

A036U21.100.0510




Spec sheet

CODE	A036U21.100.0510
SYSTEM POWER CONSUMPTION	22,2W
EFFICACY	58,18lm/W
LIGHT SOURCE	LED
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
ELECTRICAL CONFIGURATION	24V
DRIVER	remote not included
NOMINAL LUMINOUS FLUX	2896lm
DELIVERED LUMEN OUTPUT	1280lm
EFFICIENCY	44,2%
WEIGHT	3,48 lbs
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	3,9 x 41,3 x 2,0 in



Ceiling or wall lighting fixture for interiors, with direct and indirect light emission. Pickled sheet metal structure in white, bronze or mat brass polyacrylic paint, or with gold leaf coating, or in polished stainless steel. Specular aluminium reflector. Cover in brass with white, bronze or mat brass polyacrylic paint, or with gold leaf coating, or with galvanic chrome plating. Extruded polycarbonate diffuser with opaline finish.

Technical drawing

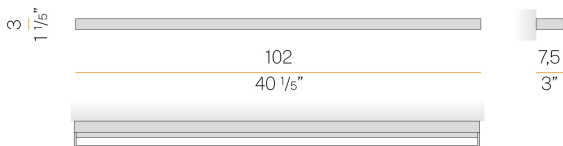

Application

