

PANZERI

Zero Line


24V DC 24V

A036U22.050.0510




Spec sheet

CODE	A036U22.050.0510
SYSTEM POWER CONSUMPTION	12,2W
EFFICACY	65.5lm/W
LIGHT SOURCE	LED
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
ELECTRICAL CONFIGURATION	24V
DRIVER	remote not included
NOMINAL LUMINOUS FLUX	1448lm
DELIVERED LUMEN OUTPUT	786lm
EFFICIENCY	54.3%
WEIGHT	2,03 lbs
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	3,9 x 32,7 x 2,0 in

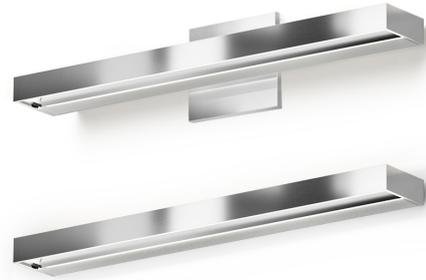

Ceiling or wall lighting fixture for interiors, with direct and indirect light emission. Pickled sheet metal structure in white, bronze or mat brass polyacrylic paint, or with gold leaf coating, or in polished stainless steel. Specular aluminium reflector. Cover in brass with white, bronze or mat brass polyacrylic paint, or with gold leaf coating, or with galvanic chrome plating. Extruded polycarbonate diffuser with opaline finish.


Technical drawing

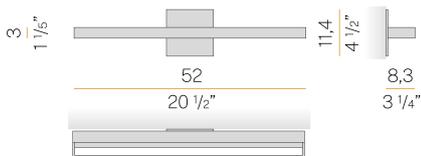

Application



Polar diagram

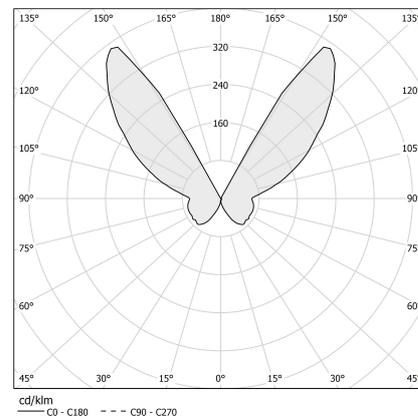

PANZERI

Zero Line

Accessories / power supply and fixing

YFJ00.70U

Junction box adapter for flush wall installation.

