PANZERI

Zero Line

120-277V AC ON-OFF
A036U22.050.0551

chrome

DIRECT + INDIRECT LIGHT

Spec sheet

CODE	A036U22.050.0551
SYSTEM POWER CONSUMPTION	12,2W
EFFICACY	65.5lm/W
LIGHT SOURCE	LED
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	120-277V AC
FREQUENCY	60Hz
ELECTRICAL CONFIGURATION	ON-OFF
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	1448lm
DELIVERED LUMEN OUTPUT	786lm
EFFICIENCY	54.3%
WEIGHT	2,03 lbs
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	3,9 x 32,7 x 2,0 in

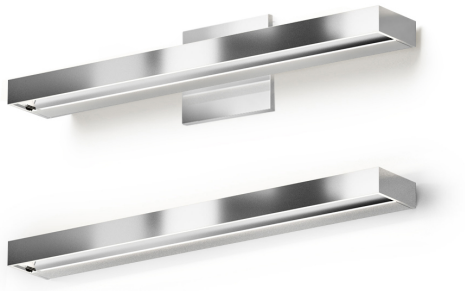

Ceiling or wall lighting fixture for interiors, with direct and indirect light emission.
Pickled sheet metal structure in white, bronze or mat brass polyacrylic paint, or with gold leaf coating, or in polished stainless steel.
Specular aluminium reflector.
Cover in brass with white, bronze or mat brass polyacrylic paint, or with gold leaf coating, or with galvanic chrome plating.
Extruded polycarbonate diffuser with opaline finish.

Technical drawing

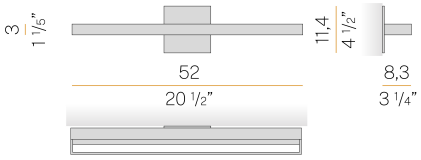

Application

Polar diagram

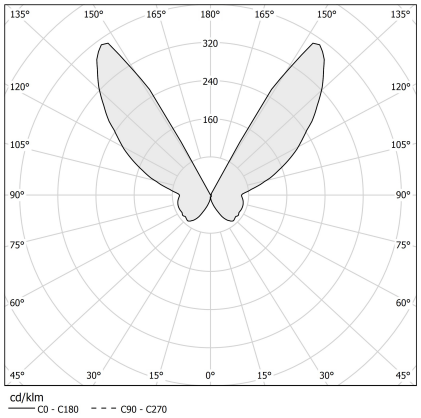

PANZERI

Zero Line

Accessories / power supply and fixing

YFJ00.70U	Junction box adapter for flush wall installation.