

# PANZERI

## Bella

120V AC 120V ON-OFF  
A052U30.011.0550

titanium




### Spec sheet

CODE	A052U30.011.0550
SYSTEM POWER CONSUMPTION	5W
EFFICACY	77.6lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B10) 70.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	adjustable
POWER SUPPLY	120V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	120V ON-OFF
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	460lm
DELIVERED LUMEN OUTPUT	388lm
EFFICIENCY	84.3%
WEIGHT	0,56 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	12,0 x 24,0 x 13,0 cm



Ceiling or wall lighting fixture for interiors, with swivelling light beam.  
Galvanized sheet metal ceiling or wall bracket.  
Die-cast aluminium wall plate in white, black, bronze, mat brass or titanium polyacrylic paint.  
Turned brass joints in polyacrylic paint.  
Die-cast aluminium structure in polyacrylic paint.  
Die-cast aluminium head rotating on three axes in polyacrylic paint.  
Modelled acrylic diffuser with mat finish.  
Aluminium closing disk in polyacrylic paint.  
Push-button to adjust luminosity according to 5 levels of visual comfort.

### Technical drawing

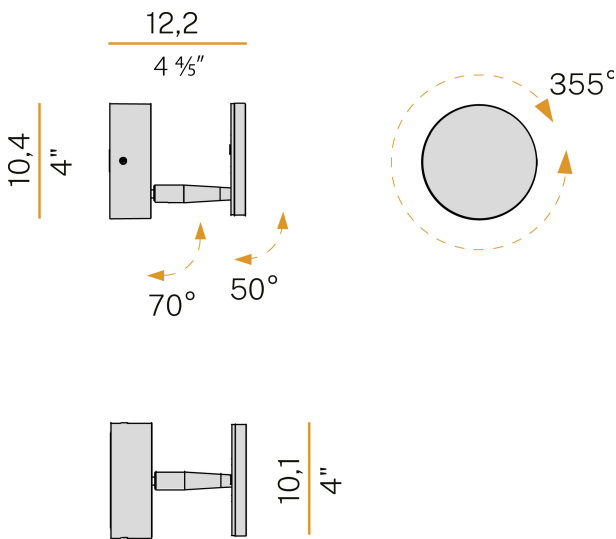

### Application



### Polar diagram

