


# PANZERI

## Hilow Line

120V AC dimmable (0-10V)

A110U17.100.0553




### Spec sheet

|                          |                     |
|--------------------------|---------------------|
| CODE                     | A110U17.100.0553    |
| SYSTEM POWER CONSUMPTION | 17W                 |
| EFFICACY                 | 59.88lm/W           |
| LIGHT SOURCE             | LED                 |
| LIGHT SOURCE LIFETIME    | L70 (B10) 60.000h   |
| COLOUR TEMPERATURE       | 2700K Ra>90         |
| LIGHT DISTRIBUTION       | diffused            |
| POWER SUPPLY             | 120V AC             |
| FREQUENCY                | 50/60Hz             |
| ELECTRICAL CONFIGURATION | dimmable (0-10V)    |
| DRIVER                   | integrated included |
| NOMINAL LUMINOUS FLUX    | 1512lm              |
| DELIVERED LUMEN OUTPUT   | 1018lm              |
| EFFICIENCY               | 67.3%               |
| WEIGHT                   | 2,56 lbs            |
| PROTECTION DEGREE        | IP20                |
| COLOUR TOLLERANCES       | SDCM 3              |
| PACKING DIMENSIONS       | 4,7 x 41,7 x 2,8 in |



Wall lighting fixture for interiors, with indirect light emission.  
 Pickled sheet metal wall bracket in polyacrylic paint.  
 Pickled sheet metal wall plate in polyacrylic paint.  
 Extruded aluminium structure in white, mat black, bronze, mat brass or titanium polyacrylic paint.  
 Die-cast aluminium end caps in polyacrylic paint.  
 Extruded polycarbonate diffuser with opaline finish.

### Technical drawing

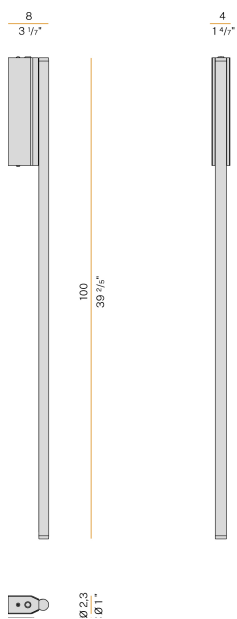

### Polar diagram

