


# PANZERI

## Hilow Line

120V AC dimmable (0-10V)

A110U17.150.0553




### Spec sheet

CODE	A110U17.150.0553
SYSTEM POWER CONSUMPTION	27W
EFFICACY	62.8lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B10) 60.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	120V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmable (0-10V)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	2520lm
DELIVERED LUMEN OUTPUT	1696lm
EFFICIENCY	67.3%
WEIGHT	2,98 lbs
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	4,7 x 63,0 x 2,8 in



Wall lighting fixture for interiors, with indirect light emission.  
 Pickled sheet metal wall bracket in polyacrylic paint.  
 Pickled sheet metal wall plate in polyacrylic paint.  
 Extruded aluminium structure in white, mat black, bronze, mat brass or titanium polyacrylic paint.  
 Die-cast aluminium end caps in polyacrylic paint.  
 Extruded polycarbonate diffuser with opaline finish.

### Technical drawing

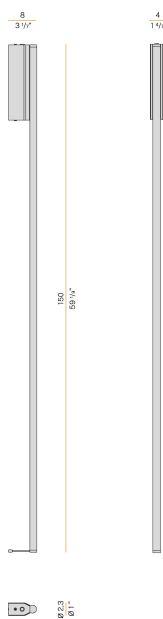

### Polar diagram

