

PANZERI

Zero Round

120V AC 120V ON-OFF

A153U19.025.4650

 mat brass




Spec sheet

CODE	A153U19.025.4650
SYSTEM POWER CONSUMPTION	11,5W
EFFICACY	90,9lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 60.000h
COLOUR TEMPERATURE	3500K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	120V AC
FREQUENCY	60Hz
ELECTRICAL CONFIGURATION	120V ON-OFF
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	1100lm
DELIVERED LUMEN OUTPUT	1000lm
EFFICIENCY	90,9%
WEIGHT	1,37 lbs
PROTECTION DEGREE	IP40
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	12,2 x 12,2 x 7,9 in



Wall lighting fixture for interiors, with direct and indirect light emission.
 Pickled sheet metal wall bracket in polyacrylic paint.
 Pickled sheet metal wall plate in polyacrylic paint.
 Bended extruded aluminium structure in white, black, bronze, mat brass or titanium polyacrylic paint.
 Extruded polycarbonate diffuser with opaline finish.

Technical drawing

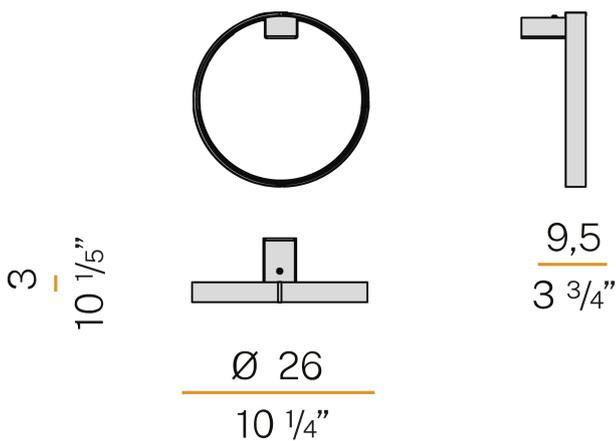

Polar diagram

