

To-be

120-277V AC 120V ON-OFF  
L026U19.065.0550




Spec sheet

|                          |                     |
|--------------------------|---------------------|
| CODE                     | L026U19.065.0550    |
| SYSTEM POWER CONSUMPTION | 7W                  |
| EFFICACY                 | 51.86lm/W           |
| LIGHT SOURCE             | LED                 |
| LIGHT SOURCE LIFETIME    | L70 (B50) 60.000h   |
| COLOUR TEMPERATURE       | 2700K Ra>90         |
| LIGHT DISTRIBUTION       | diffused            |
| POWER SUPPLY             | 120-277V AC         |
| FREQUENCY                | 60Hz                |
| ELECTRICAL CONFIGURATION | 120V ON-OFF         |
| DRIVER                   | integrated included |
| NOMINAL LUMINOUS FLUX    | 546lm               |
| DELIVERED LUMEN OUTPUT   | 363lm               |
| EFFICIENCY               | 66.5%               |
| WEIGHT                   | 1,63 lbs            |
| PROTECTION DEGREE        | IP40                |
| COLOUR TOLLERANCES       | SDCM 3              |
| PACKING DIMENSIONS       | 2,0 x 41,3 x 3,9 in |



Suspension lighting fixture for interiors, with direct light emission.  
Extruded aluminium structure in white, mat black, bronze or mat brass polyacrylic paint or with gold leaf coating.  
Extruded aluminium heat sink.  
Modelled polycarbonate diffuser with opaline finish.  
Turned brass end cap in polyacrylic paint.  
2m (78,7") long suspension and power cable in transparent PVC.  
Power canopy with pickled sheet metal ceiling bracket and extruded aluminium covering in white, mat black, bronze or mat brass polyacrylic paint or with gold leaf coating.

Technical drawing

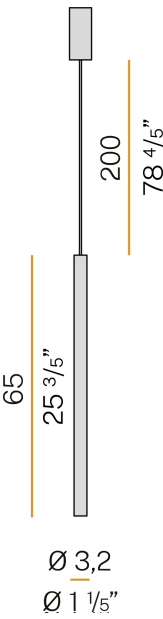

Polar diagram

