

# PANZERI

## Arena

120-277V AC dimmable (0-10V)

L074U02.150.0553



### Spec sheet

CODE	L074U02.150.0553
SYSTEM POWER CONSUMPTION	78W
EFFICACY	86.45lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 60.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused + adjustable
BEAM ANGLE	30°
POWER SUPPLY	120-277V AC
FREQUENCY	60Hz
ELECTRICAL CONFIGURATION	dimmable (0-10V)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	8522lm
DELIVERED LUMEN OUTPUT	6743lm
EFFICIENCY	79.1%
WEIGHT	16.58 lbs
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	63,0 x 63,0 x 4,3 in



Suspension lighting fixture for interiors, with direct and indirect light emission and swivelling accent light.

Bended extruded aluminium structure in white, black, bronze, mat brass or titanium polyacrylic paint.

Extruded polycarbonate diffuser with opaline finish.

Die-cast aluminium joints in polyacrylic paint.

Die-cast aluminium projectors rotating on two axes in polyacrylic paint.

Reflectors in thermoplastic material with chrome plated finish.

Textured glass screens.

Anti-glare snoots in black thermoplastic material.


5m (196,9") long steel suspension cables.

5m (196,9") long power cable in transparent PVC.

Power canopy with pickled sheet metal ceiling bracket and covering in white, black, bronze, mat brass or titanium polyacrylic paint.

### Technical drawing

### Polar diagram

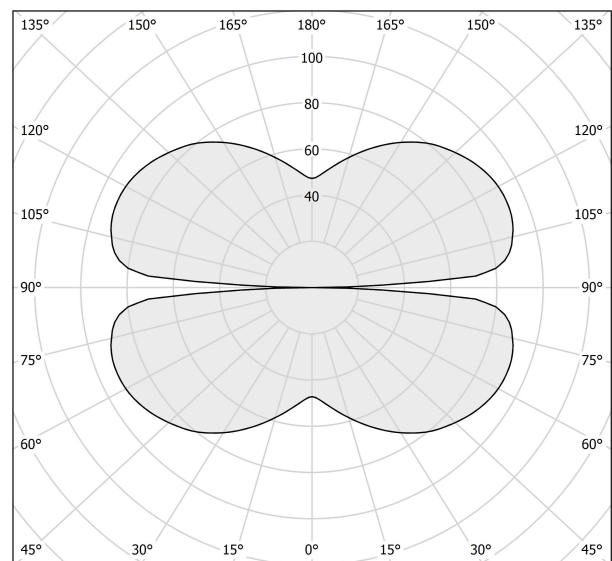

cd/klm  
— C0 - C180    - - - C90 - C270