

# PANZERI

## Ginevra

120-277V AC dimmable (0-10V)

L092U80.050.4653

 black/gold

DIRECT  
LIGHT


### Spec sheet

CODE	L092U80.050.4653
SYSTEM POWER CONSUMPTION	36W
EFFICACY	81lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B20) 80.000h
COLOUR TEMPERATURE	3500K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	120-277V AC
FREQUENCY	60Hz
ELECTRICAL CONFIGURATION	dimmable (0-10V)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	4528lm
DELIVERED LUMEN OUTPUT	2916lm
EFFICIENCY	64.4%
GLARE RATING	UGR < 19
WEIGHT	13,82 lbs
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM <3
PACKING DIMENSIONS	7,9 x 24,4 x 24,4 in




Pendant lighting fixture for interiors, with direct and indirect light emission.  
Pickled sheet metal cap in polyacrylic paint.  
Turned aluminium structure in mat black and gold or white and gold polyacrylic paint.  
Pickled sheet metal wiring support plat

### Technical drawing

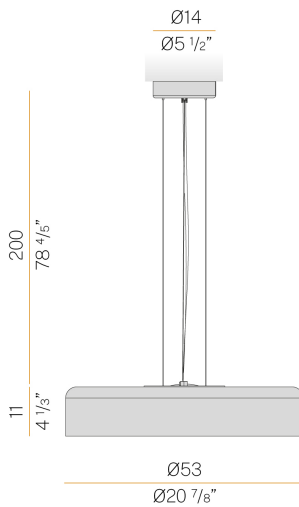

### Polar diagram

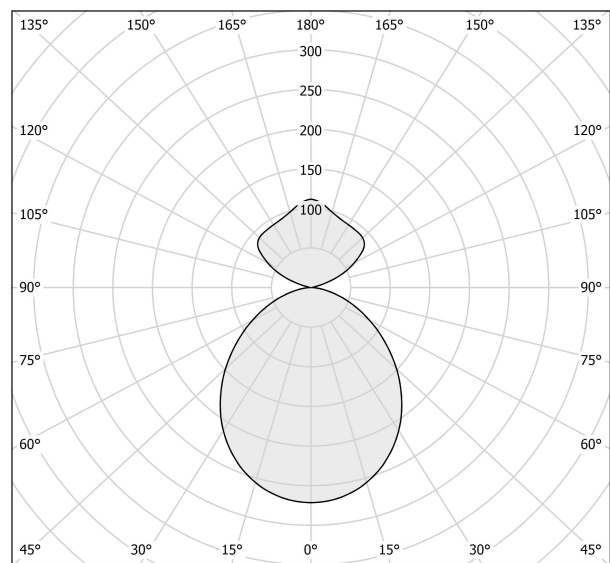

cd/klm  
— C0 - C180    - - - C90 - C270