

PANZERI

Ginevra

120-277V AC dimmable (0-10V)

L092U80.080.4653

 black/gold




Spec sheet

CODE	L092U80.080.4653
SYSTEM POWER CONSUMPTION	82W
EFFICACY	94.9lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B20) 80.000h
COLOUR TEMPERATURE	3500K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	120-277V AC
FREQUENCY	60Hz
ELECTRICAL CONFIGURATION	dimmable (0-10V)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	10285lm
DELIVERED LUMEN OUTPUT	7782lm
EFFICIENCY	75.7%
GLARE RATING	UGR < 19
WEIGHT	24,18 lbs
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM <3
PACKING DIMENSIONS	7,1 x 35,4 x 35,4 in




Pendant lighting fixture for interiors, with direct and indirect light emission.
Pickled sheet metal cap in polyacrylic paint.
Turned aluminium structure in mat black and gold or white and gold polyacrylic paint.
Pickled sheet metal wiring support plat

Technical drawing

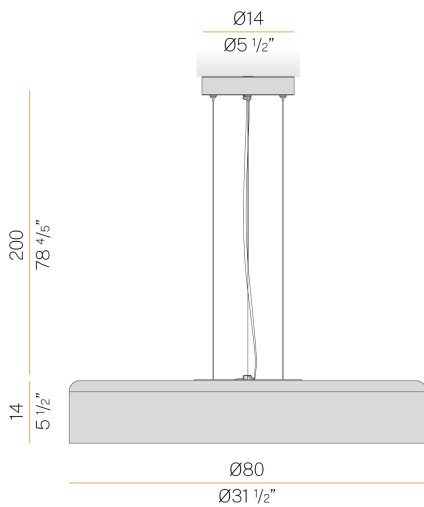

Polar diagram

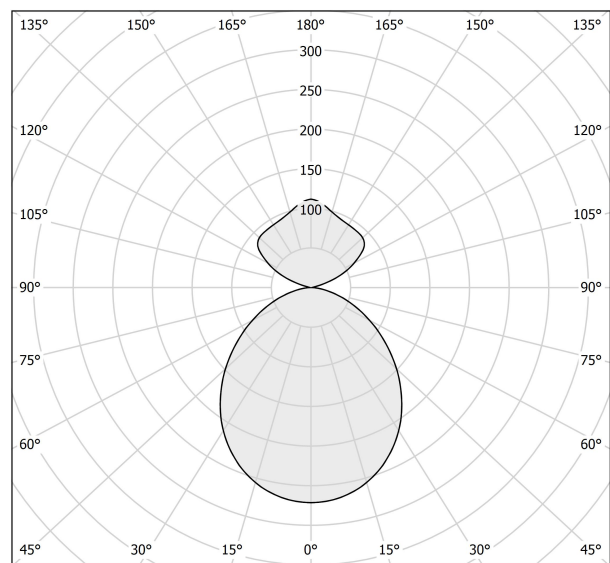

cd/klm
— C0 - C180 - - - C90 - C270