

# PANZERI

## Ginevra

120-277V AC dimmable (0-10V)

L092U81.050.4653

 white/gold




### Spec sheet

|                          |                      |
|--------------------------|----------------------|
| CODE                     | L092U81.050.4653     |
| SYSTEM POWER CONSUMPTION | 36W                  |
| EFFICACY                 | 81lm/W               |
| LIGHT SOURCE             | LED                  |
| LIGHT SOURCE LIFETIME    | L80 (B20) 80.000h    |
| COLOUR TEMPERATURE       | 3500K Ra>90          |
| LIGHT DISTRIBUTION       | diffused             |
| POWER SUPPLY             | 120-277V AC          |
| FREQUENCY                | 60Hz                 |
| ELECTRICAL CONFIGURATION | dimmable (0-10V)     |
| DRIVER                   | integrated included  |
| NOMINAL LUMINOUS FLUX    | 4528lm               |
| DELIVERED LUMEN OUTPUT   | 2916lm               |
| EFFICIENCY               | 64.4%                |
| GLARE RATING             | UGR < 19             |
| WEIGHT                   | 13,82 lbs            |
| PROTECTION DEGREE        | IP20                 |
| COLOUR TOLLERANCES       | SDCM <3              |
| PACKING DIMENSIONS       | 7,9 x 24,4 x 24,4 in |




Pendant lighting fixture for interiors, with direct and indirect light emission.  
 Pickled sheet metal cap in polyacrylic paint.  
 Turned aluminium structure in mat black and gold or white and gold polyacrylic paint.  
 Pickled sheet metal wiring support plat

### Technical drawing

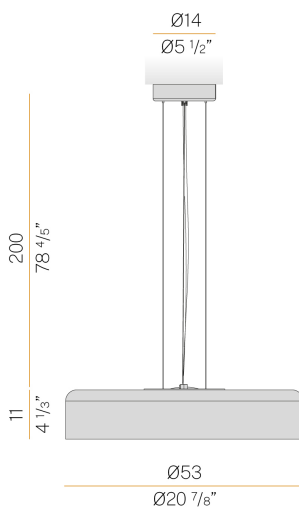

### Polar diagram

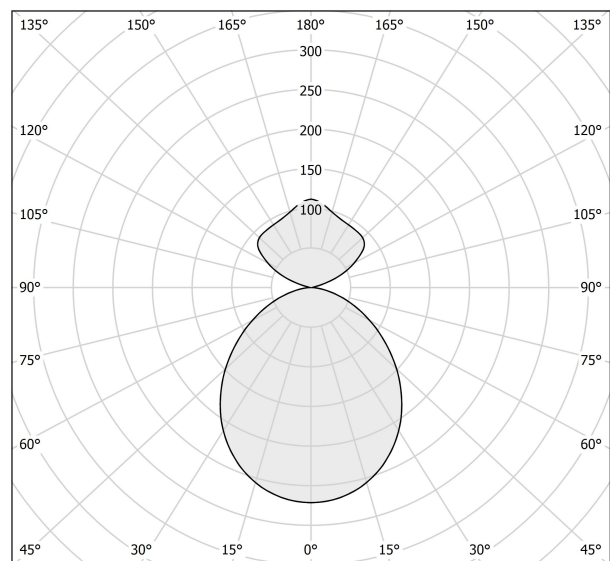

cd/klm  
 — C0 - C180    - - - C90 - C270