

PANZERI

Gong

120-277V AC dimmable (0-10V)
L093U01.100.0453




Spec sheet

CODE	L093U01.100.0453
SYSTEM POWER CONSUMPTION	88W
EFFICACY	100.28lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L90 (B10) 50.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	120-277V AC
FREQUENCY	60Hz
ELECTRICAL CONFIGURATION	dimmable (0-10V)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	11128lm
DELIVERED LUMEN OUTPUT	8825lm
EFFICIENCY	79.3%
WEIGHT	16,20 lbs
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	7,1 x 41,7 x 41,7 in



Suspension lighting fixture for interiors, with indirect light emission.
Aluminium and pickled sheet metal structure in polyacrylic paint.
Turned aluminium reflector in white or black polyacrylic paint or with gold leaf coating.
Moulded acrylic diffuser with mat finish.
2m (78,7") long steel suspension cables.
2,2m (86,6") long power cable in transparent PVC.
Power canopy with pickled sheet metal case in white or black polyacrylic paint or with gold leaf coating.

Technical drawing

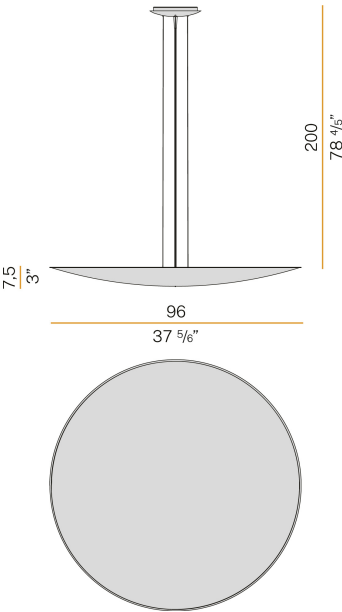

Polar diagram

