


# PANZERI

## Murané

120V AC 120V ON-OFF  
L118U05.018.0550

 champagne




### Spec sheet

CODE	L118U05.018.0550
SYSTEM POWER CONSUMPTION	4W
EFFICACY	41.75lm/W
LIGHT SOURCE	LED
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	120V AC
FREQUENCY	60Hz
ELECTRICAL CONFIGURATION	120V ON-OFF
DRIVER	integrated included
DELIVERED LUMEN OUTPUT	167lm
WEIGHT	2,62 lbs
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	0,0 x 0,0 x 0,0 in



Pendant lighting fixture for interiors, with direct and indirect light emission.  
Turned brass wiring support.  
Diffuser in blown glass with smoky grey crystal colour.  
Turned aluminium closing disk in champagne polyacrylic paint.  
3m (118,1") long Pendan

### Technical drawing

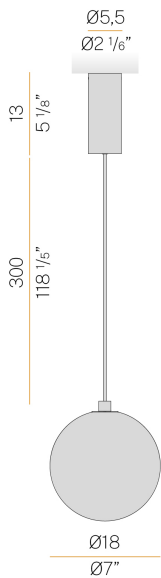

### Polar diagram

