

PANZERI

Murané R

24V DC 24V

M116U05.110.0510

● champagne



Spec sheet

CODE	M116U05.110.0510
SYSTEM POWER CONSUMPTION	67W
EFFICACY	54.88lm/W
LIGHT SOURCE	LED
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
ELECTRICAL CONFIGURATION	24V
DRIVER	remote not included
DELIVERED LUMEN OUTPUT	3677lm
WEIGHT	22,71 lbs
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	42,1 x 42,1 x 4,3 in




Single or multiple pendant lighting fixture for interiors, with direct and indirect light emission.

Bended extruded aluminium structure in champagne or mat black polyacrylic paint. Pickled sheet metal cover in polyacrylic paint.

Turned brass wiring sup

Technical drawing

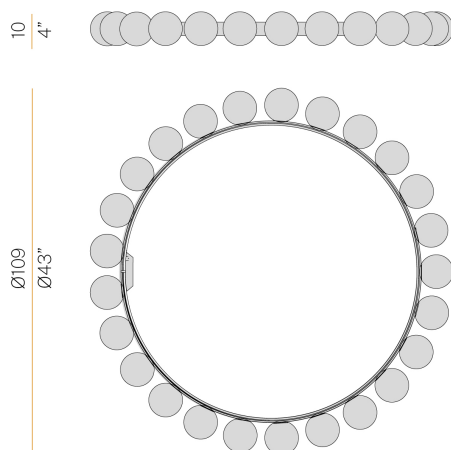

Polar diagram

