


# PANZERI

## Zero Round

24V DC 24V

M155U30.150.4610

 titanium



### Spec sheet

CODE	M155U30.150.4610
SYSTEM POWER CONSUMPTION	71W
EFFICACY	86.2lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 60.000h
COLOUR TEMPERATURE	3500K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
ELECTRICAL CONFIGURATION	24V
DRIVER	remote not included
NOMINAL LUMINOUS FLUX	8505lm
DELIVERED LUMEN OUTPUT	6120lm
EFFICIENCY	72%
WEIGHT	3,48 lbs
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	63,0 x 63,0 x 4,3 in





Single or multiple pendant lighting fixture for interiors, with direct and indirect light emission.


Bended extruded aluminium structure in white, black, bronze, mat brass or titanium polyacrylic paint.

Extruded polycarbonate diffuser with opaline finish

### Technical drawing



### Polar diagram

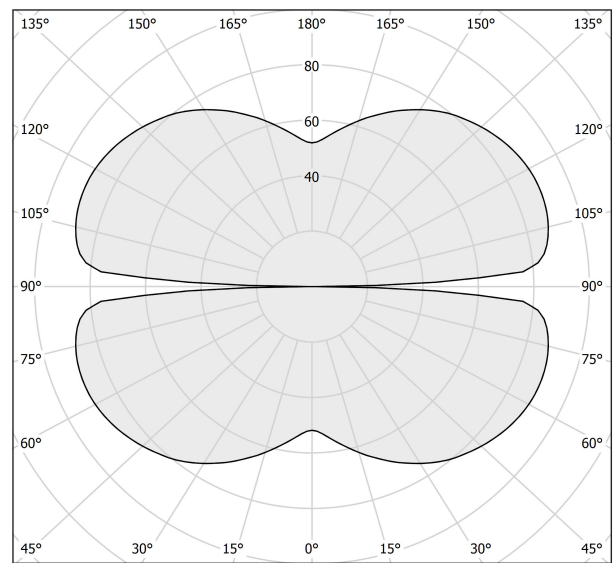

cd/klm  
 — C0 - C180    - - - C90 - C270