

# PANZERI

## Zero Round

24V DC 24V


M155U30.200.0510

titanium



### Spec sheet

CODE	M155U30.200.0510
SYSTEM POWER CONSUMPTION	88W
EFFICACY	92.7lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 60.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
ELECTRICAL CONFIGURATION	24V
DRIVER	remote not included
NOMINAL LUMINOUS FLUX	11340lm
DELIVERED LUMEN OUTPUT	8158lm
EFFICIENCY	71.9%
WEIGHT	2,34 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	200,0 x 200,0 x 11,0 cm



Single or multiple suspension lighting fixture for interiors, with direct and indirect light emission.

Bended extruded aluminium structure in white, black, bronze, mat brass or titanium polyacrylic paint.

Extruded polycarbonate diffuser with opaline finish.


Suspension kit with griplocks and 5m (196,9") long steel cables.

5m (196,9") long power cable in transparent PVC.

Provided without power canopy.

### Technical drawing

### Polar diagram

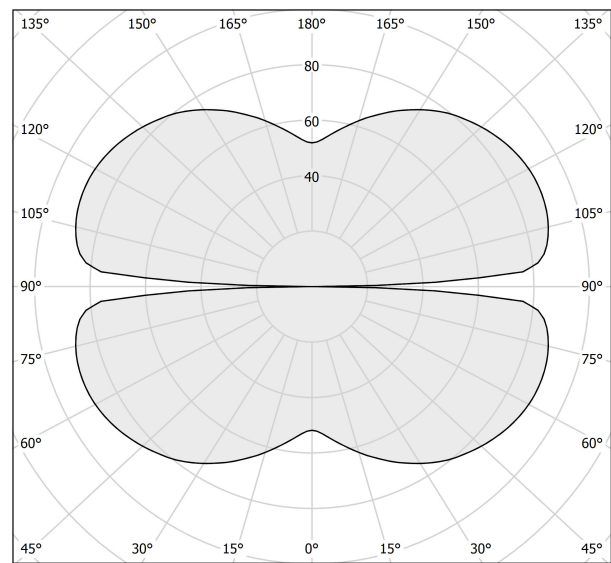

cd/klm  
— C0 - C180    - - - C90 - C270