

# PANZERI

## To-be

120-277V AC 120V ON-OFF  
P027U17.045.1750




### Spec sheet

|                          |                     |
|--------------------------|---------------------|
| CODE                     | P027U17.045.1750    |
| SYSTEM POWER CONSUMPTION | 10W                 |
| EFFICACY                 | 80.6lm/W            |
| LIGHT SOURCE             | LED                 |
| LIGHT SOURCE LIFETIME    | L70 50.000h         |
| COLOUR TEMPERATURE       | 2700K Ra>90         |
| LIGHT DISTRIBUTION       | flood               |
| BEAM ANGLE               | 35°                 |
| POWER SUPPLY             | 120-277V AC         |
| FREQUENCY                | 60Hz                |
| ELECTRICAL CONFIGURATION | 120V ON-OFF         |
| DRIVER                   | integrated included |
| NOMINAL LUMINOUS FLUX    | 806lm               |
| DELIVERED LUMEN OUTPUT   | 806lm               |
| EFFICIENCY               | 100%                |
| WEIGHT                   | 1,86 lbs            |
| PROTECTION DEGREE        | IP20                |
| COLOUR TOLLERANCES       | SDCM 3              |
| PACKING DIMENSIONS       | 4,1 x 17,7 x 4,1 in |



Ceiling lighting fixture for interiors, with direct light emission.  
Extruded aluminium structure in white, mat black, bronze or mat brass polyacrylic paint or with gold leaf coating.  
Pickled sheet metal wiring support brackets in polyacrylic paint.  
Anodized extruded aluminium heat sink.  
Reflector in thermoplastic material with chrome plated finish.  
Transparent polycarbonate screen.

### Technical drawing

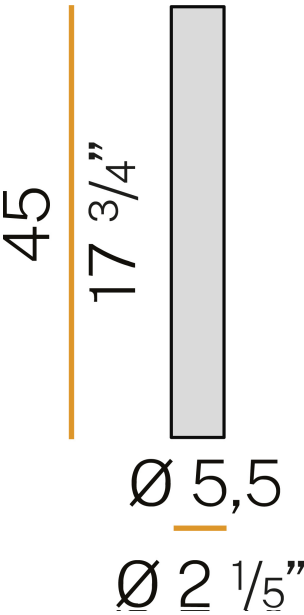

### Polar diagram

