

# PANZERI

## Hilow

120V AC dimmable (0-10V)

P029U01.115.4653

● white



### Spec sheet


CODE	P029U01.115.4653
SYSTEM POWER CONSUMPTION	72W
EFFICACY	36.82lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B10) 60.000h
COLOUR TEMPERATURE	3500K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	120V AC
ELECTRICAL CONFIGURATION	dimmable (0-10V)
DRIVER	remote not included
NOMINAL LUMINOUS FLUX	8820lm
DELIVERED LUMEN OUTPUT	2651lm
EFFICIENCY	30.1%
WEIGHT	6,55 lbs
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	34,3 x 46,5 x 5,5 in



Ceiling lighting fixture for interiors, with direct and indirect light emission.  
Pickled sheet metal ceiling bracket in polyacrylic paint.  
Pickled sheet metal wall plate in polyacrylic paint.  
Extruded aluminium structure in white, mat black, bronze, mat brass or titanium polyacrylic paint.  
Joints in turned brass and die-cast aluminium in polyacrylic paint.  
Die-cast aluminium end caps in polyacrylic paint.  
Extruded polycarbonate diffusers with black finish for direct light emission and opaline finish for indirect light emission.

### Technical drawing

### Polar diagram

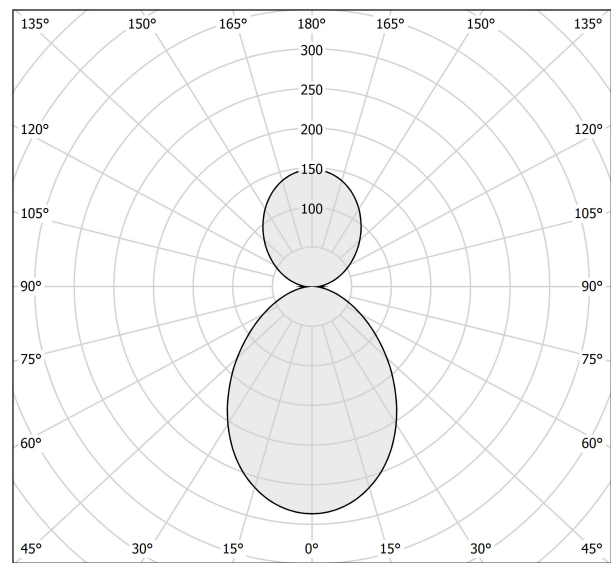

cd/klm  
— C0 - C180    - - - C90 - C270