

# PANZERI

## Ginevra

120-277V AC dimmable (0-10V)

P092U80.050.4653

 black/gold




### Spec sheet

|                          |                      |
|--------------------------|----------------------|
| CODE                     | P092U80.050.4653     |
| SYSTEM POWER CONSUMPTION | 25W                  |
| EFFICACY                 | 75.08lm/W            |
| LIGHT SOURCE             | LED                  |
| LIGHT SOURCE LIFETIME    | L80 (B20) 80.000h    |
| COLOUR TEMPERATURE       | 3500K Ra>90          |
| LIGHT DISTRIBUTION       | diffused             |
| POWER SUPPLY             | 120-277V AC          |
| FREQUENCY                | 60Hz                 |
| ELECTRICAL CONFIGURATION | dimmable (0-10V)     |
| DRIVER                   | integrated included  |
| NOMINAL LUMINOUS FLUX    | 3100lm               |
| DELIVERED LUMEN OUTPUT   | 1877lm               |
| EFFICIENCY               | 60.5%                |
| GLARE RATING             | UGR < 19             |
| WEIGHT                   | 11,50 lbs            |
| PROTECTION DEGREE        | IP20                 |
| COLOUR TOLLERANCES       | SDCM <3              |
| PACKING DIMENSIONS       | 22,8 x 22,8 x 5,5 in |



Ceiling or wall lighting fixture for interiors, with direct light emission.  
Turned aluminium structure in mat black and gold or white and gold polyacrylic paint.  
Pickled sheet metal wiring support plate in polyacrylic paint.  
Moulded polycarbonate micro-prismatic diffuser.

### Technical drawing

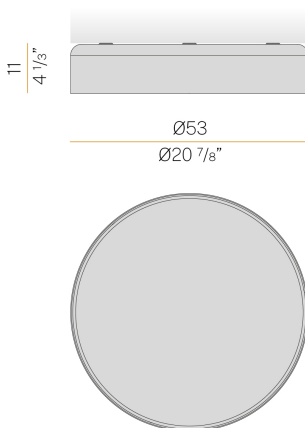

### Application



### Polar diagram

