

PANZERI

Ginevra

120V AC 120V-277V dimmable (0-10V)

P092U80.080.0453

 black/gold




Spec sheet

| | |
|--------------------------|----------------------------|
| CODE | P092U80.080.0453 |
| SYSTEM POWER CONSUMPTION | 71W |
| EFFICACY | 94.97lm/W |
| LIGHT SOURCE | LED |
| LIGHT SOURCE LIFETIME | L80 (B20) 80.000h |
| COLOUR TEMPERATURE | 3000K Ra>90 |
| LIGHT DISTRIBUTION | diffused |
| POWER SUPPLY | 120V AC |
| FREQUENCY | 50/60Hz |
| ELECTRICAL CONFIGURATION | 120V-277V dimmable (0-10V) |
| DRIVER | integrated included |
| NOMINAL LUMINOUS FLUX | 8857lm |
| DELIVERED LUMEN OUTPUT | 6743lm |
| EFFICIENCY | 76.1% |
| GLARE RATING | UGR < 19 |
| WEIGHT | 10,07 Kg |
| PROTECTION DEGREE | IP20 |
| COLOUR TOLLERANCES | SDCM <3 |
| PACKING DIMENSIONS | 18,0 x 90,0 x 90,0 cm |



Ceiling or wall lighting fixture for interiors, with direct light emission.
Turned aluminium structure in mat black and gold or white and gold polyacrylic paint.
Pickled sheet metal wiring support plate in polyacrylic paint.
Moulded polycarbonate micro-prismatic diffuser.

Technical drawing

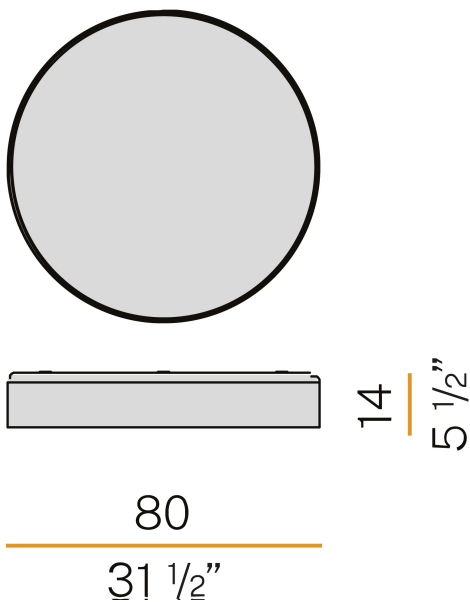

Application



Polar diagram

