

# PANZERI

## Ginevra

120-277V AC dimmable (0-10V)

P092U81.050.4653

 white/gold



### Spec sheet


CODE	P092U81.050.4653
SYSTEM POWER CONSUMPTION	25W
EFFICACY	75.08lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B20) 80.000h
COLOUR TEMPERATURE	3500K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	120-277V AC
FREQUENCY	60Hz
ELECTRICAL CONFIGURATION	dimmable (0-10V)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	3100lm
DELIVERED LUMEN OUTPUT	1877lm
EFFICIENCY	60.5%
GLARE RATING	UGR < 19
WEIGHT	11,50 lbs
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM <3
PACKING DIMENSIONS	22,8 x 22,8 x 5,5 in



Ceiling or wall lighting fixture for interiors, with direct light emission. Turned aluminium structure in mat black and gold or white and gold polyacrylic paint. Pickled sheet metal wiring support plate in polyacrylic paint. Moulded polycarbonate micro-prismatic diffuser.



### Technical drawing

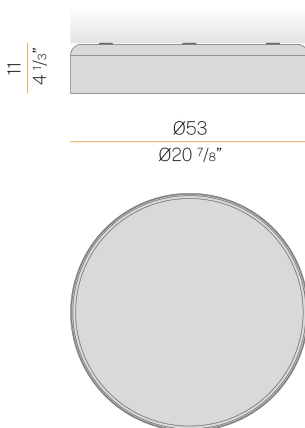

### Application



### Polar diagram

