


PANZERI

Ginevra

120V AC 120V-277V dimmable (0-10V)

P092U81.080.0453

 white/gold




Spec sheet

CODE	P092U81.080.0453
SYSTEM POWER CONSUMPTION	71W
EFFICACY	94.97lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B20) 80.000h
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	120V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	120V-277V dimmable (0-10V)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	8857lm
DELIVERED LUMEN OUTPUT	6743lm
EFFICIENCY	76.1%
GLARE RATING	UGR < 19
WEIGHT	10,07 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM <3
PACKING DIMENSIONS	18,0 x 90,0 x 90,0 cm



Ceiling or wall lighting fixture for interiors, with direct light emission.
Turned aluminium structure in mat black and gold or white and gold polyacrylic paint.
Pickled sheet metal wiring support plate in polyacrylic paint.
Moulded polycarbonate micro-prismatic diffuser.

Technical drawing

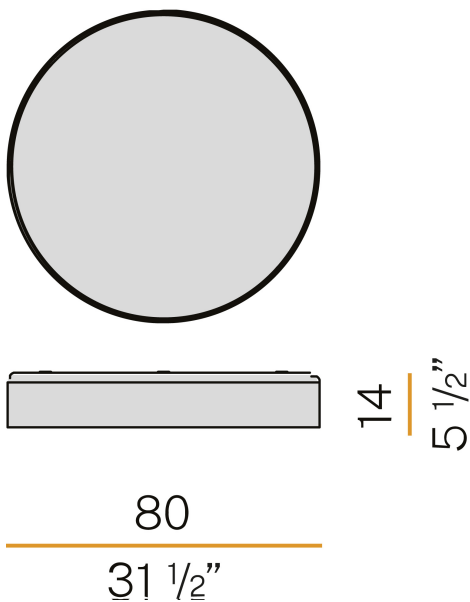

Application



Polar diagram

