


# PANZERI

## Zero Round

120-277V AC dimmable (0-10V)

P153U17.050.4653



bronze




### Spec sheet

CODE	P153U17.050.4653
SYSTEM POWER CONSUMPTION	29W
EFFICACY	70.31lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 60.000h
COLOUR TEMPERATURE	3500K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	120-277V AC
FREQUENCY	60Hz
ELECTRICAL CONFIGURATION	dimmable (0-10V)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	2835lm
DELIVERED LUMEN OUTPUT	2039lm
EFFICIENCY	71.9%
WEIGHT	3,11 lbs
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	22,8 x 22,8 x 3,9 in



Ceiling or wall lighting fixture for interiors, with direct and indirect light emission.  
 Pickled sheet metal ceiling or wall bracket in polyacrylic paint.  
 Pickled sheet metal wall plate in polyacrylic paint.  
 Bended extruded aluminium structure in white, black, bronze, mat brass or titanium polyacrylic paint.  
 Extruded polycarbonate diffuser with opaline finish.

### Technical drawing

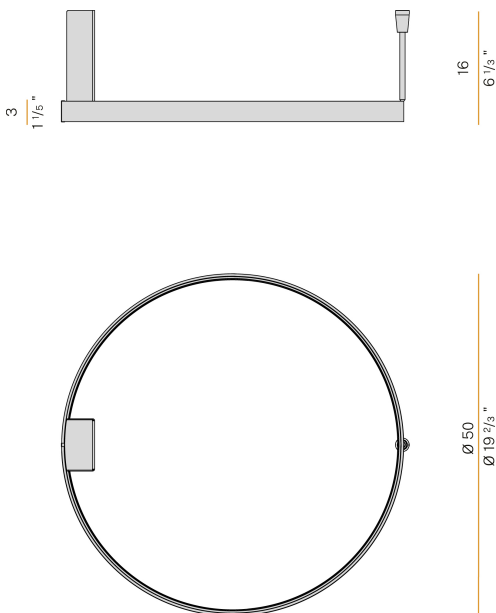

### Application



### Polar diagram

