


# PANZERI

## Hilow Line


120V AC dimmer on cable  
T108U28.200.0522

 textured soft white




### Spec sheet

CODE	T108U28.200.0522
SYSTEM POWER CONSUMPTION	39W
EFFICACY	69.59lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B10) 60.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	120V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmer on cable
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	4032lm
DELIVERED LUMEN OUTPUT	2714lm
EFFICIENCY	67.3%
WEIGHT	9,44 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	0,0 x 0,0 x 0,0 cm



Floor lighting fixture for interiors, with indirect light emission.  
Bearing base in travertine.  
Extruded aluminium structure in bronze, mat brass or textured soft white polyacrylic paint.  
Die-cast aluminium end caps in polyacrylic paint.  
Extruded polycarbonate diffuser with opaline finish.  
Equipped with a 3m (118,1") long power cable with switch to adjust luminosity and plug.

### Technical drawing

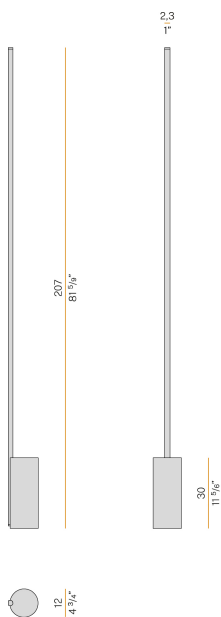

### Polar diagram

