

# PANZERI

## Tubino

120V AC 120V ON-OFF  
X073U06.001.0550

● mat black




### Spec sheet

CODE	X073U06.001.0550
SYSTEM POWER CONSUMPTION	6,5W
EFFICACY	56.5lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 80.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	adjustable
POWER SUPPLY	120V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	120V ON-OFF
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	475lm
DELIVERED LUMEN OUTPUT	339lm
EFFICIENCY	71.4%
WEIGHT	1,09 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	29,0 x 24,0 x 14,0 cm



Lighting fixture for ceiling or wall semi-built-in installation for interiors, with swivelling light beam.  
Pickled sheet metal fixing disk in white polyacrylic paint.  
Pickled sheet metal wall plate in white, champagne, mat black, bronze or titanium polyacrylic paint.  
Turned brass joints in polyacrylic paint.  
Turned aluminium structure in polyacrylic paint.  
Turned aluminium head rotating on two axes in polyacrylic paint.  
Modelled polycarbonate diffuser with opaline finish.  
Turned brass end cap in polyacrylic paint.  
Recessed housing for masonry or plasterboard, in pickled sheet metal in polyacrylic paint.  
Pickled sheet metal brackets for plasterboard fixing.  
Built-in hole dimension: 95x95mm (3,7x3,7")

### Technical drawing

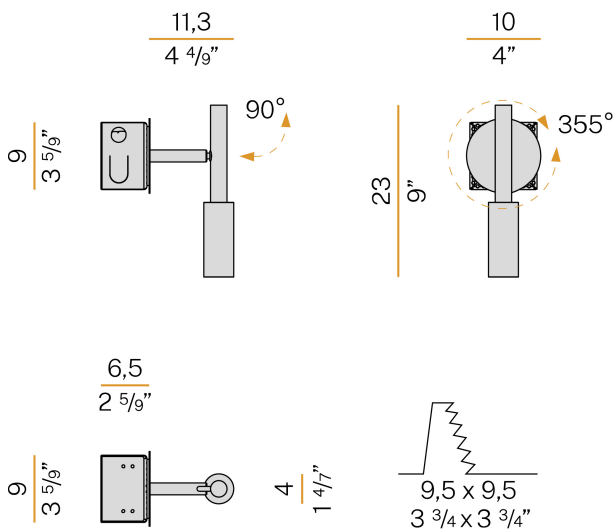

### Application



### Polar diagram

