Corner

24V DC XG2045-300TRACK

Spec sheet

XG2045-300TRACK
max 24W/m
LED
diffused
24V DC
remote not included
UGR < 19
4,51 lbs
IP40 IP20
3,2 x 3,2 x 123,6 in
3010
118 3/5"

3000m 118 215




Technical drawing

60mm 2 ^{3/8}"

55mm 2 1/6"

29mm

1 1/7"

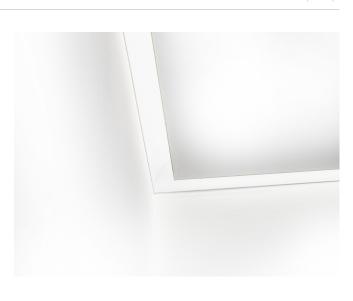

Modular profile for ceiling or wall perimeter installation for interiors, with direct light emission.

Hidden structure for plasterboard panels, in extruded aluminium in RAL 9003 white powder paint.

Extruded polycarbonate diffuser with opaline finish. Light modules and driver to be ordered separately.


Fastening, joining and closing accessories to be ordered separately.

Application

white



Polar diagram



Corner

Accessories / source

XM006.012.0410	LED module, 125mm (5") 16 LED 2,2W 24V DC 3000K Ra>90 2851m.	
CE EHE 🐵		
XM006.050.0410	LED module, 500mm (19,7") 64 LED 8,6W 24V DC 3000K Ra>90 1140lm.	
CE ERE 💿		
YLR005.010.0510	LED STRIP: 5m /5cm 9.6W/m 2700K CRI90 24V 1100lm/m	
CE EHE		
YLR005.010.0610	LED STRIP: 5m /5cm 9.6W/m 4000K CRI90 24V 1300lm/m	
CE EHL III)		
YLR006.017.0410	LED STRIP: 5m /5cm 16.8W/m 3000K CRI90 24V 2070lm/m	
CE ERE 🐨		
YLR006.017.0510	LED STRIP: 5m /5cm 16.8W/m 2700K CRI90 24V 1900lm/m	
CE ERE		
YLR006.017.0610	LED STRIP: 5m /5cm 16.8W/m 4000K CRI90 24V 2220lm/m	
CE EHE		
YLR007.022.0410	LED STRIP: 5m /4.2cm 22W/m 3000K CRI90 24V 2700lm/m	
CE EHL া		
YLR007.022.0510	LED STRIP: 5m /4.2cm 22W/m 2700K CRI90 24V 2490lm/m	
CE ERE 🐵		

Corner

Accessories / source

YLR007.022.0610

LED STRIP: 5m /4.2cm 22W/m 4000K CRI90 24V 2750lm/m



Corner

Accessories / diffusion XM2033/34/45/46-1200S Extruded polycarbonate diffuser with opaline finish, 12000mm (472,4°) long. C € FHI Image: Struded polycarbonate diffuser with opaline finish, 6000mm (236,2°) long. XM2033/34/45/46-600S Extruded polycarbonate diffuser with opaline finish, 6000mm (236,2°) long. C € FHI Image: Struded polycarbonate diffuser with opaline finish, 6000mm (354,3°) long. XM2033/34/45/46-900S Extruded polycarbonate diffuser with opaline finish, 9000mm (354,3°) long. C € FHI



Panzeri-USA.com - 17/09/2025 - Corner - XG2045-300TRACK

Corner

Accessories / junction

XM2045-ANG 3	Connection joint for two lines of modular profiles with internal perpendicular junction 90°, for perimetral installation.	
XM2045-ANG 4	Connection joint for two lines of modular profiles with external perpendicular junction 90°, for perimetral installation.	
xm2045-u	Linear junction.	2 %*
XM2045-U90 1	Connection joint for two lines of modular profiles with internal level junction 90°, for perimetral installation.	
XM2045-U90 2	Connection joint for two lines of modular profiles with external level junction 90°, for perimetral installation.	

Corner

Accessories / closing

XM2045-T

Pair of end caps with screws.



